

PRISM P3 0,72

Ideal solution for channel letters with a depth of 80 - 120 mm and light boxes with enhanced brightness. Due to professional optics directs more light to the surface of illuminated signs. Cost-effective solution to achieve more brightness at reasonable price. Various color solutions available

Specially designed for:


- Channel letters
- Light boxes with enhanced brightness
- Recommended installation depth 80 - 120 mm

Features:


- Special optics designed for channel letters
- Efficiency up to 95 lm/W
- Maximum Tj temperature <80 °C
- LM80 international certificate for LEDs
- V1 fire protection level
- High protection level of IP66
- Light decay < 30% after 50,000 hrs
- 5 years warranty



Dimensions

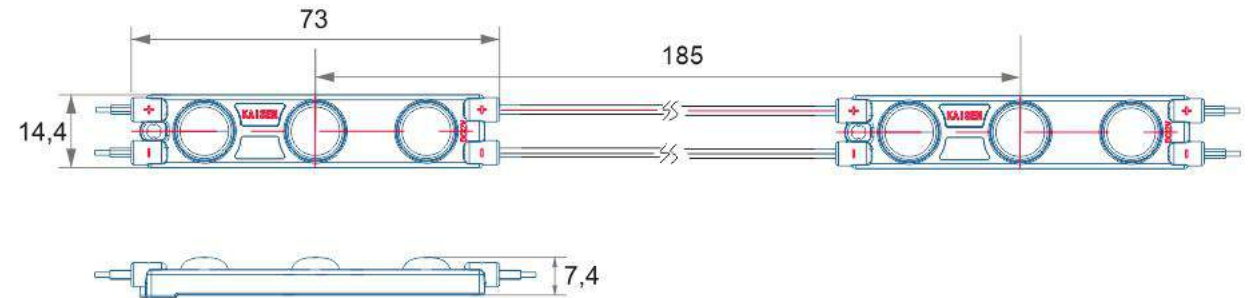

Light distribution graph

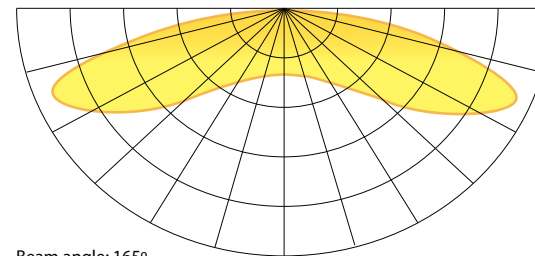

Beam angle: 165°

Technical information

Colors available :	<input type="radio"/>
Power	0,72 W
Light output	68 lm
LED type	2835
Input	12VDC
Color temperature	3500 / 6500 / 7500 / 10000 / 15000 K
Beam angle	165°
Protection level	IP 66
Center-to-Center distance	185 mm
Working temperature	-30 +50 °C

Packing information

Packing type	Chain	Package	Box
Quantity	20 pcs	200 pcs	2400 pcs
Weight	0,21 kg	2,13 kg	25,6 kg

